

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/085574 A1**

(51) International Patent Classification<sup>7</sup>: **E05F 11/48**,  
15/16

(21) International Application Number:  
PCT/CA2005/000289

(22) International Filing Date: 28 February 2005 (28.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/550,115 4 March 2004 (04.03.2004) US

(71) Applicant (for all designated States except US): **INTIER  
AUTOMOTIVE CLOSURES INC.** [CA/CA]; 521 New-  
park Boulevard, Newmarket, Ontario L3Y 4X7 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WATSON, Jason,**


**William** [CA/CA]; 1710-65 Forestmanor Road, Toronto,  
Ontario M2J 1M5 (CA). **HODGINS, T., Carter** [CA/CA];  
266 Beverley Drive, Keswick, Ontario L4P 1Y3 (CA).  
**RAEDTS, Gary, R.** [CA/CA]; 6 Murray Street, Barrie,  
Ontario L4N 2X2 (CA). **STEFAN, Dan** [CA/CA]; 35  
Woodriver Street, Richmond Hill, Ontario L4S 1B7 (CA).

(74) Agents: **PORAT, Alex** et al.; Magna International INC.,  
337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

[Continued on next page]

(54) Title: WINDOW REGULATOR

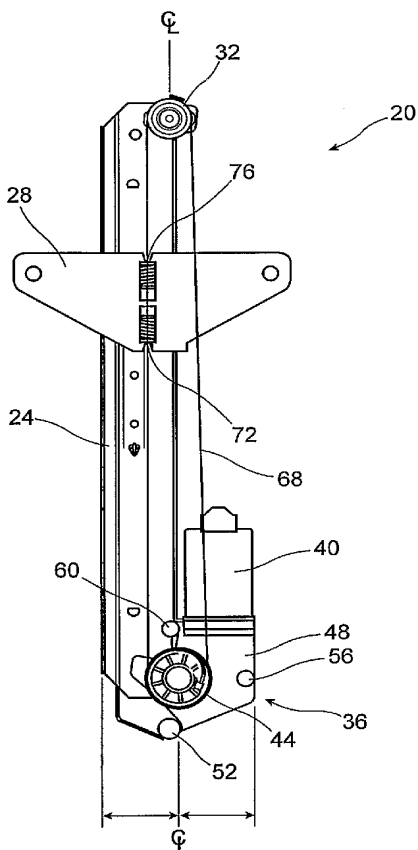

(57) Abstract: A window regulator wherein the drive means can be pivoted, during assembly, to move the centers of the driven drum and a guide closer together to provide for easy routing of the flexible drive member and can then be moved apart to tension the flexible drive member to complete the assembly. The regulator can be a single rail regulator or a dual rail regulator and the flexible drive member can be a belt, wire cable or other suitable device.

WO 2005/085574 A1



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

### **ABSTRACT**

A window regulator wherein the drive means can be pivoted, during assembly, to move the centers of the driven drum and a guide closer together to provide for easy routing of the flexible drive member and can then be moved apart to tension the flexible drive member to complete the assembly. The regulator can be a single rail regulator or a dual rail regulator and the flexible drive member can be a belt, wire cable or other suitable device.